



POWER LOGIC

[www.KossUPS.com.my](http://www.KossUPS.com.my)

KOSS  
UPS

## EnerG II 800S

### 800VA

- For Office and Multimedia PC's
- Point of Sales Terminal
- Other Office Equipment

### Line Interactive UPS

- User Friendly LED Indicator
- Green Power Design
- Compact & Light Weight
- Boost & Buck Multi Step AVR
- Sealed Lead Acid Maintenance Free Battery
- Lightning, Spike & Surge Protection
- Phone / Fax / Modem Line Protection (RJ11)
- Comes With USB Port & Power Management Software



Malaysia



UK



USA



Korea


**NOW! 3 YEARS**  
**FULL WARRANTY**  
Parts & Labour  
2 Years for Battery

# EnerG II 800S

## 800VA

### KOSS Line Interactive UPS

- User Friendly LED Indicator
- Green Power Design
- Compact & Light Weight
- Boost & Buck Multi Step AVR
- Sealed Lead Acid Maintenance Free Battery
- Lightning, Spike & Surge Protection
- Phone / Fax / Modem Line Protection (RJ11)
- Comes With USB Port & Power Management Software

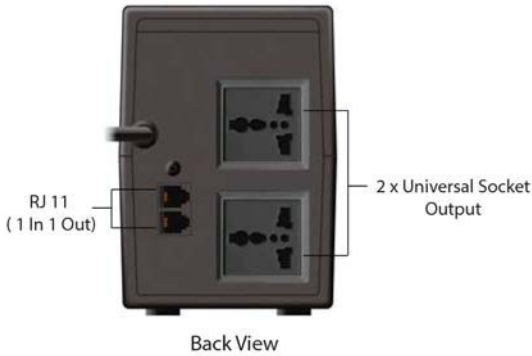

**KOSS** UPS

#### Technical Specification:

MODEL	EnerG II 800S
CAPACITY (VA)	800VA
<b>INPUT</b>	
INPUT VOLTAGE	220V/230V/240V
VOLTAGE RANGE	170-280VAC
<b>OUTPUT</b>	
OUTPUT VOLTAGE	220V/230V/240V
OUTPUT FREQUENCY	50Hz or 60Hz +/-1Hz
OUTPUT WAVEFORM	Modified Sinewave
TRANSFER TIME (Typical)	2ms - 6ms
OUTPUT SOCKET	2 x Universal Socket
<b>BATTERY</b>	
SEALED LEAD ACID MAINTENANCE FREE BATTERY - (YUASA/LEOCH)	12V 7AH x 1
BACK UP TIME (Depending on Load)	10 - 15 minutes
RECHARGE TIME	6 Hours to 90% After Complete Discharge
<b>STATUS INDICATOR</b>	
LED INDICATOR	1 x L.E.D Indicator AC Mode - (Green Lighting); Back-up Mode (Green Flashing)
AUDIBLE ALARM	Back-Mode (Sounding every 10 second) Battery Low (Sounding every 1 second) Over Load (Sounding every 0.5 second) UPS Fault (Continuous sounding)
<b>COMMUNICATION</b>	
POWER MANAGEMENT SOFTWARE	Support Window Family, Linux, Sun Solaris, IBM Aix, Compaq True 64, FreeBSD, HP-UX, MAC - Automatically Shut-down, Saves Application Data Before Exit - Power Flow Display for Monitoring UPS Status - Schedules System Shutdown/Restart - Warning Notification Via E-Mail/Pager/Broadcast - Remote Monitor/Control via LAN - Safety Shutdown Multi System - Records Logs for Analysis
INTERFACE	USB Port
<b>SURGE PROTECTION &amp; FILTERING</b>	
SPIKE, SURGE & LIGHTNING PROTECTION	Meet EN62040-2(according to EN61000-4-5 level 3) surge standard
OVERLOAD PROTECTION	Line mode: 110%+20%/-10%; shutdown after 5 minutes and go to fault mode. 120%+20%/-10%; shutdown immediately and go to fault mode. Battery mode: 110%+20%/-10%; shutdown after 5 seconds 120%+20%/-10%; shutdown immediately
SHORT CIRCUIT PROTECTION	Fault on Battery Mode
PHONE / FAX / MODEM PROTECTION	RJ 11 (1 in 1 out)
<b>PHYSICAL</b>	
OPERATING ENVIRONMENT	0-40°C, 0-90% Relative Humidity (Non-Condensing)
NOISE LEVEL	Less Than 40dB
DIMENSION (D x W x H) mm	278 x 100 x 143
WEIGHT (KG)	4.5
<b>WARRANTY</b>	
UPS WARRANTY	3 Years Full Warranty Include Parts & Labour 2 Years Warranty for Battery

\*Specification subjects to change without prior notice

[www.kossUPS.com.my](http://www.kossUPS.com.my)